

# TNP Digital Torque Meter

*Torque Testing Instrument for Medical, Pharmaceutical and Industrial Quality Control, R&D and countless torque applications*




The new TNP torque meter is a precision instrument that measures OPEN and CLOSE torque values for various applications. As a cap torque analyzer, the TNP repeatedly determines bottle closure and breakaway torque. It has a wide memory capacity capable of storing 1,000 data points in addition to Average, Maximum and Minimum values. A HI-LO comparator feature can be utilized for large batch testing to ensure overall product quality.

The TNP torque meter is USB capable for computer testing. Combined with the free Digitorg Software, additional analysis and testing can be performed.

The TNP is a portable device powered with internal rechargeable batteries or thru an AC adapter/charger. Designed with a small footprint it can easily be transferred to maximize use around the shop floor or the laboratory.

## FEATURES & BENEFITS


High Accuracy	$\pm 0.5\%$ F.S.
Wide Torque Range	2Nm, 5Nm and 10Nm models
Adjustable Sample Size	Quick and easy set-up takes seconds
Test Memory	One touch operation, retains up to 1000 measurements
Variable Units of Measures:	Displays Torque values in, lb./in., Lbin, Kgcm and Nm, Ncm
Large Digital Display	Easy to read L.C.D.
PC Output	USB interface with add in software (Digitorg)
Flexible Power	Rechargeable NiMH batteries and / or Universal AC adapter
Selectable Measuring Modes	Captures Peak Opening, Closing and Average torque values (CCW, CW)
Portable	Small foot print, compact, space saver design

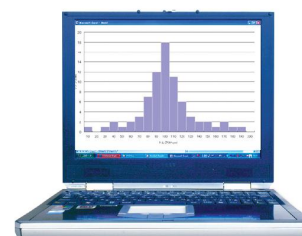

Free Digitorg Software  
with Graphing Capability



TNP Digital Torque Meter

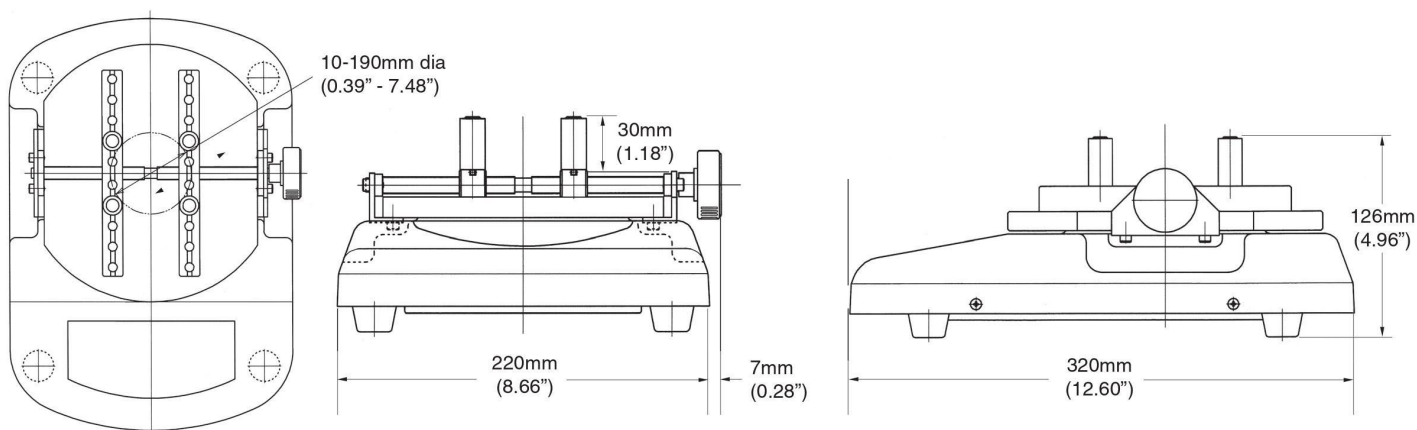

## SPECIFICATIONS

TNP- XX Series Digital Torque Tester w/USB interface			
TNP Models	TNP-2	TNP-5	TNP-10
Measuring units	Nm, Ncm, Kgcm, lbin	Nm, Ncm, Kgcm, lbin	Nm, Ncm, Kgcm, lbin
Measuring range	0-2.000 Nm	0-5.00 Nm	0-10.00 Nm
	0-200.0 Ncm	0-500.0 Ncm	0-1000 Ncm
	0-20.39 Kgcm	0-50.99 Kgcm	0-102.0 Kgcm
	0-17.70 Lbin	0-44.25 Lbin	0-88.5 Lbin
Overload protection / Percentage overload	Yes / 150%		
Sample diameter range	Φ10 - 190 mm ( 0.39 " - 7.48" )		
Overload display	Display "OVR" at sub display of LCD, blinking LED		
Display	Main display	4-digit LCD display Character height 12mm	
	Sub display	3-digit LCD display Character height 7mm	
	Comparator Display	HI, GO, LO LED	
Accuracy		± 0.5% F.S.	
Measuring mode	Opening mode	Show max value when opening (peak display) Displays max counter clockwise torque.	
	Closing mode	Show max value when closing (peak display) Displays max clockwise torque	
	Average mode	Real time display (average value display) Displays max torque in real time.	
Display Update Time		Select from 0.125 second (8times/second), 0.25 second (4 times/second), 0.5 second (2times/second), 1 second(1time/second). Peak display: 0.125 second	
Sampling Rate		1000 times/second	
Memory	Memory data number	1000 data (max)	
	Statistic process	Average value, max value min value	
Data output		USB1.1	
PC software		Digitorq software (free, download from web site: <a href="http://www.shimpointst.com">www.shimpointst.com</a> )	
Accessories		USB cable, AC adapter, 30mm chuck pin (4pcs), Manual	
Power		Built in nickel hydride battery or Auto-ranging AC adapter (AC100 - 240V)	
Dimensions L x W x H mm/ in		320 x 227x 126 (12.60" x 8.94" x 4.96" )	
Shipping weight		8 kg (17.62lb)	12.5 kg (27.53lb)
Operation environment		0 - 40 degree C / 32 - 104 degree F	
Certifications		CE approval	
Battery Life		8 hours after full charge	
Battery Recharge Time		Max. 16 hours	
Battery Type		NiMH	